


<p><b>Operating Tools</b></p> <p>Operation parallel to conductor entry</p>	<p><b>Operating Tools</b></p> <p>Operation perpendicular to conductor entry</p>	<p><b>Operating Tool</b></p>
--	---	------------------------------




Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
<p><b>Multipole operating tool</b>, insulated, 5/5.08 mm pin spacing, operation parallel to conductor entry, suitable for male and female connectors with CAGE CLAMP®, also suitable for 280 Series rail-mounted terminal blocks</p>		<p><b>Operating tool</b>, insulated, 5/5.08 mm pin spacing, operation perpendicular to conductor entry, suitable for male and female connectors with CAGE CLAMP®</p>		<p><b>Operating tool</b>, suitable for 2080 Series</p>	
1-pole	209-130	1	2-pole	209-132	1
2-pole	280-432	1			
3-pole	280-433	1			
4-pole	280-434	1			
5-pole	280-435	1			
6-pole	280-436	1			
7-pole	280-437	1			
8-pole	280-438	1			
9-pole	280-439	1			
10-pole	280-440	1			



Inserting a male connector with long contact pins into a front-entry rail-mounted terminal block via 6-pole operating tool.

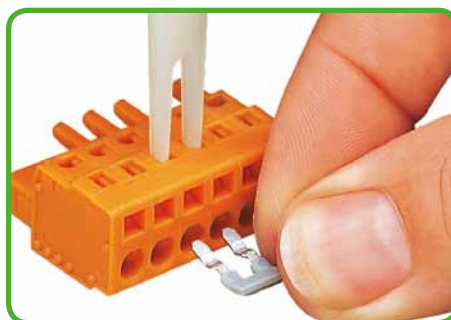

Commoning a female connector with 231-902 comb-style jumper bar via 2-pole operating tool.

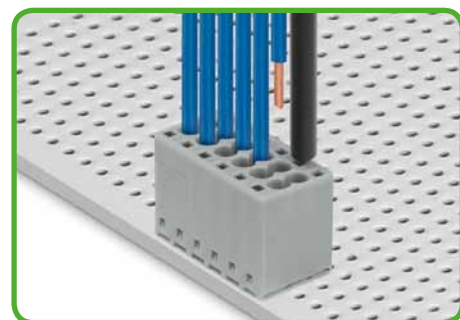

Conductor removal (2080 Series) - via push-button and 1 mm  $\varnothing$  operating tool (206-880).