

Наконечники


Серия 216

Гильзы для мм ²	Цвет AWG	Длина зачистки L мм	L1	D	D1	D2	Артикул	Упак. Единица	
Изолированные наконечники увеличенной длины для клемм TOPJOB®S									
0,5	22	12,0	16,0	10,0	3,1	2,6	1,0	216-241	1000
0,75	20	12,0	16,0	10,0	3,3	2,8	1,2	216-242	1000
0,75	20	14,0	18,0	12,0	3,3	2,8	1,2	216-262	1000
1,0	18	12,0	16,0	10,0	3,5	3,0	1,4	216-243	1000
1,0	18	14,0	18,0	12,0	3,5	3,0	1,4	216-263	1000
1,5	16	12,0	16,0	10,0	4,0	3,5	1,7	216-244	1000
1,5	16	14,0	18,0	12,0	4,0	3,5	1,7	216-264	1000
1,5	16	20,0	24,0	18,0	4,0	3,5	1,7	216-284	1000
2,5	14	12,0	17,0	10,0	4,7	4,2	2,2	216-246	1000
2,5	14	14,0	19,0	12,0	4,7	4,2	2,2	216-266	1000
2,5	14	20,0	25,0	18,0	4,7	4,2	2,2	216-286	1000
4,0	12	14,0	20,0	12,0	5,4	4,8	2,8	216-267	500
4,0	12	20,0	26,0	18,0	5,4	4,8	2,8	216-287	500
6,0	10	14,0	20,0	12,0	6,9	6,3	3,5	216-208	500
6,0	10	20,0	26,0	18,0	6,9	6,3	3,5	216-288	500
10,0	8	20,0	28,0	18,0	8,4	7,6	4,5	216-289	500
16,0	6	23,0	28,0	18,0	9,6	8,8	5,8	216-210	500




Изолированные наконечники стандартной длины

0,25	24	7,5	10,5	6,0	2,5	2,0	0,8	216-321	1000
0,25	24	9,5	12,5	8,0	2,5	2,0	0,8	216-301	1000
0,35	24	7,5	10,5	6,0	2,5	2,0	0,8	216-322	1000
0,34	24	9,5	12,5	8,0	2,5	2,0	0,8	216-302	1000
0,5	22	7,5	11,5	6,0	3,0	2,5	1,1	216-221	1000
0,5	22	9,5	13,5	8,0	3,0	2,5	1,1	216-201	1000
0,75	20	8,0	12,0	6,0	3,3	2,8	1,3	216-222	1000
0,75	20	10,0	14,0	8,0	3,3	2,8	1,3	216-202	1000
1,0	18	8,0	12,0	6,0	3,6	3,0	1,5	216-223	1000
1,0	18	10,0	14,0	8,0	3,6	3,0	1,5	216-203	1000
1,5	16	8,0	12,0	6,0	4,0	3,4	1,8	216-224	1000
1,5	16	10,0	14,0	8,0	4,0	3,4	1,8	216-204	1000
2,08	14	10,0	14,5	8,0	4,2	3,6	2,05	216-205	1000
2,5	14	10,0	15,0	8,0	4,8	4,2	2,3	216-206	1000
4,0	12	12,0	16,8	9,5	5,4	4,8	2,9	216-207	1000
6,0	10	14,0	20,0	12,0	6,8	6,2	3,5	216-208	100
10,0	8	16,0	21,0	12,0	8,1	7,5	4,6	216-209	100
16,0	6	23,0	28,0	18,0	9,6	8,8	5,8	216-210	100

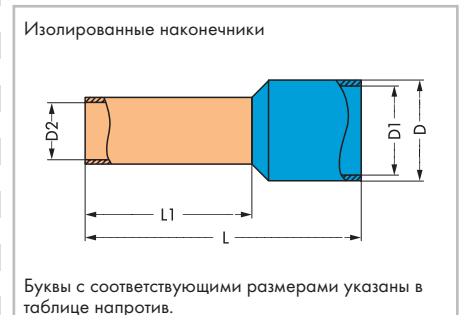

Изолированные двойные наконечники увеличенной длины для клемм TOPJOB® S

2 x 0,5	2 x 20	10,0	16,4	10,0	3,5x2,0	2,9x1,4	1,4	216-530	500
2 x 1,0	2 x 18	12,0	19,2	12,0	5,8x3,2	5,2x2,6	2,0	216-542	500
2 x 1,5	2 x 16	12,0	20,0	12,0	6,5x3,6	5,9x3,0	2,2	216-543	500
2 x 2,5	2 x 14	12,0	21,0	12,0	8,0x4,5	7,2x3,7	2,8	216-545	500
2 x 4,0	2 x 12	12,0	22,0	12,0	9,0x5,2	8,0x4,2	3,5	216-546	500
2 x 6,0	2 x 10	12,0	23,0	12,0	11,4x6,2	10,4x5,2	4,5	216-547	500

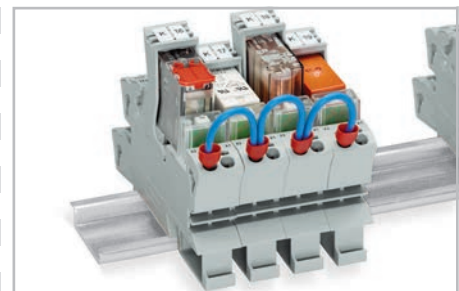

Проводная перемычка с двойными наконечниками

Неизолированные наконечники стандартной длины

0,25	24	5,0	5,0	1,7	0,75	216-151	1000
0,25	24	7,0	7,0	1,7	0,75	216-131	1000
0,34	24	5,0	5,0	1,7	0,85	216-152	1000
0,34	24	7,0	7,0	1,7	0,85	216-132	1000
0,5	22	6,0	6,0	2,1	1,0	216-121	1000
0,5	22	8,0	8,0	2,1	1,0	216-101	1000
0,75	20	6,0	6,0	2,3	1,2	216-122	1000
0,75	20	8,0	8,0	2,3	1,2	216-102	1000
1,0	18	6,0	6,0	2,5	1,4	216-123	1000
1,0	18	8,0	8,0	2,5	1,4	216-103	1000
1,5	16	6,0	6,0	2,8	1,7	216-124	1000
1,5	16	8,0	8,0	2,8	1,7	216-104	1000
2,5	14	10,0	10,0	3,4	2,2	216-106	1000
4,0	12	10,0	10,0	4,0	2,8	216-107	1000
6,0	10	12,0	12,0	4,7	3,5	216-108	250
10,0	8	12,0	12,0	5,8	4,5	216-109	250
16,0	6	12,0	15,0	7,5	5,8	216-110	250

