


High-current terminal block, with two M8 stud bolts

Color	Item No.	Pack. Unit
○ light gray	400-490/490-002	5

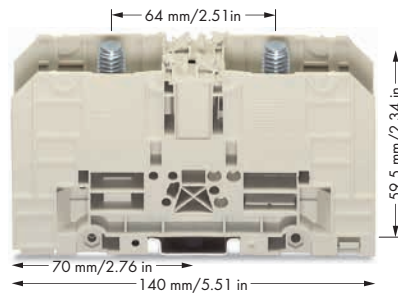

High-current terminal block, with two M10 stud bolts

Color	Item No.	Pack. Unit
○ light gray	400-490/490-003	5

IEC/EN 60947-7-1

1000 V

8 kV

192 A

70 mm²

UL/CSA

600 V

170 A

10 ... 3/0 AWG

6 ... 95 mm²6 ... 70 mm²6 ... 70 mm²

13 mm

6 ... 12 Nm / 52 lb-in

T-wrench (6 mm)

6 ... 12 Nm / 52 lb-in

32 mm / 1.26 inch

Polyamide 66 (PA 66)

IEC/EN 60947-7-1

1000 V

8 kV

269 A

120 mm²

UL/CSA

600 V

269 A

10 AWG ... 300 kcmil

2.5 ... 35 mm²2.5 ... 35 mm²2.5 ... 35 mm²

max. 300 kcmil

max. 300 kcmil

17 mm

10 ... 20 Nm / 87 ... 174 lb-in

T-wrench (6 mm)

6 ... 12 Nm / 52 ... 104 lb-in

42 mm / 1.654 inch

Polyamide 66 (PA 66)

	Item No.	Pack. Unit
light gray	400-490/490-017	5
2-way	400-405/405-774	25(5)
3-way	400-405/405-775	25(5)
	400-405/405-768	10
gray	249-117	50(25)

	Item No.	Pack. Unit
light gray	400-490/490-018	5
2-way	400-405/405-776	10(5)
3-way	400-405/405-777	5
	400-405/405-769	10
gray	249-117	50(25)